




## LOOP PILE MASER PM32




The bottom rapiers insert the fillings for the ground structure of the carpet. The top rapiers insert false fillings above lancets. These lancets determine the loop height. The pile yarns form loops around the false filling that are cut in the middle and removed on both sides of the carpet during weaving.

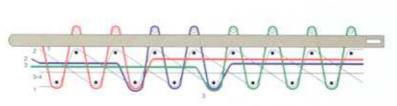

1/2 V loop pile weave structure woven through to the back






1/2 V loop pile weave structure not woven through to the back




When equipped with a Piletronic Jacquard machine controlling the pile yarns, various weave structures in high loop, low loop or loop over several fillings can be woven.

## LOOP PILE MASTER PVI

recommended free height: min. 5,7 m

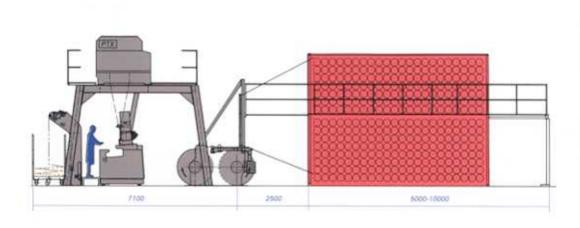

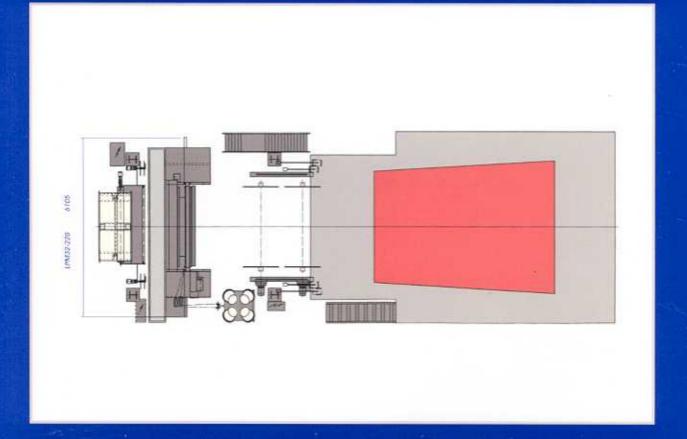

## (): VAN DE WIELE

N.V. MICHEL VAN DE WIELE - MICHEL VANDEWIELESTRAAT 7-17 - B-8510 MARKE - BELGIUM HRK 411
TEL. +32(0)56/24 32 11 - FAX +32(0)56/24 35 40 - E-MAIL: info@vandewiele.com - http://www.vandewiele.com